

Pressure sequence valve, direct operated

RE 26091/12.09

1/8

Type ZDZ

Size 10
Component series 5X
Maximum operating pressure 210 bar
Maximum flow 80 l/min



H7649

Table of contents

Content
Features
Ordering code
Symbols
Function, section
Technical data
Characteristic curves
Unit dimensions

Features

Page	
1	– Sandwich plate valve
1	– Porting pattern according to ISO 4401-05-04-0-05
2	– Subplates see data sheet RE 45054 (separate order)
2	– 4 pressure ratings
3	– 4 adjustment types, optionally:
4	• Rotary knob
5	• Threaded pin with hexagon and protective cap
5	• Lockable rotary knob with scale
6	• Rotary knob with scale
	– With pressure gauge connection

Information on available spare parts:
www.boschrexroth.com/spc


Ordering code

Z	DZ	10	D		-5X/	Y	M	*
Sandwich plate valve								Further details in the plain text
Pressure sequence valve								Seal material
Size 10		= 10						no code = NBR seals
Direct operated		= D						V = FKM seals
Pressure reduction in channel A (pilot oil from channel A①)		= A						(other seals at request)
Pressure reduction in channel A (pilot oil from channel A②)		= C						Attention!
Pressure reduction in channel P		= P						Observe compatibility of seals with hydraulic fluid used!
Adjustment type								M = without check valve
Rotary knob		= 1						Y = Pilot oil supply internal, pilot oil return external
Threaded pin with hexagon and protective cap		= 2						
Lockable rotary knob with scale ¹⁾		= 3						
Rotary knob with scale		= 7						Pressure rating
Component series 50 to 59 (50 to 59: unchanged installation and connection dimensions)		= 5X						25 = Maximum sequencing pressure 25 bar
								75 = Maximum sequencing pressure 75 bar
								150 = Maximum sequencing pressure 150 bar
								210 = Maximum sequencing pressure 210 bar


¹⁾ H-key with material no. R900008158 is included in the delivery.

Symbols (① = component side, ② = plate side)


Version “A”

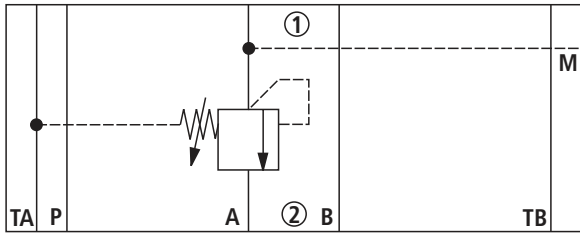

Version “P”

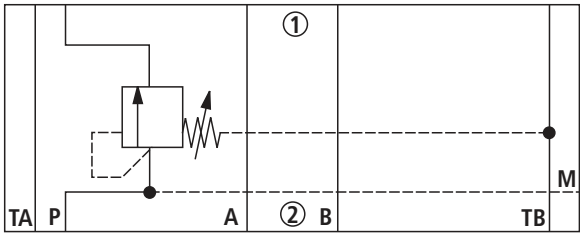

Version “C”

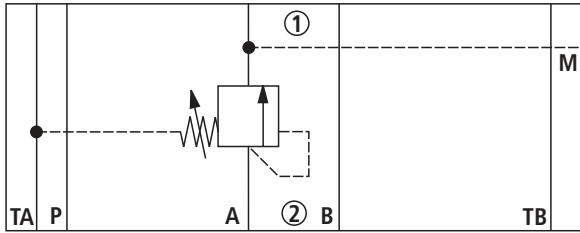

Function, section

The valve type ZDZ is a direct operated pressure sequence valve in sandwich plate design. It is used for the pressure-dependent sequencing of a second system. The sequencing pressure is set via the adjustment type (4).

Version "C"

The compression spring (3) holds the control spool (2) in the initial position - the valve is blocked. Via the pilot line (5), the pressure in channel A② is applied to the spool face of the control spool (2) vis-à-vis the compression spring (3).

If the pressure in channel A② reaches the set value of the compression spring (3), the control spool (2) is pushed to the left and the connection A② to A① is opened. The system connected at A① is sequenced without a drop of the pressure in channel A②.

The leakage oil drain from the spring chamber (7) is always realized externally, via channel T (Y).


A pressure gauge connection (8) allows for the control of the sequencing pressure at the valve.

Version "A"

Here, the pressure is sequenced in channel A. Control signal and pilot fluid are provided internally, from channel A①.

Version "P"

With this version, the pressure is sequenced in channel P. Control signal and pilot fluid are provided internally, from channel P②.

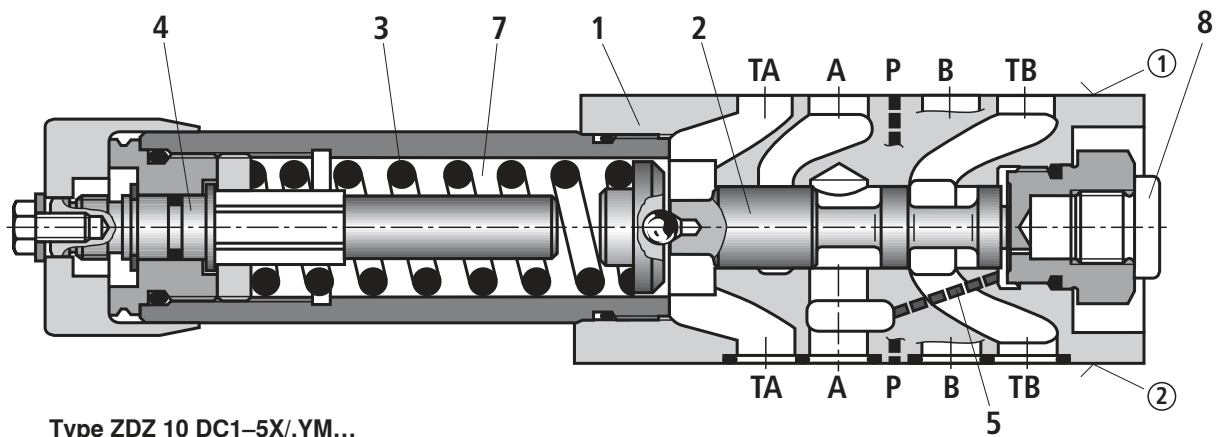

Type ZDZ 10 DC1-5X.YM...

① = component side

② = plate side

Technical data (For applications outside these parameters, please consult us!)**general**

Weight	kg	Approx. 2.8
Installation position		Any
Ambient temperature range	°C	-30 to +80 (NBR seals) -20 to +80 (FKM seals)

hydraulic

Maximum operating pressure	- Port P, A, B	bar	210
	- Port T (Y)	bar	160
Maximum sequencing pressure (adjustable)		bar	25; 75; 150; 210
Maximum flow		l/min	80
Hydraulic fluid			Mineral oil (HL, HLP) according to DIN 51524 ¹⁾ ; Fast bio-degradable hydraulic fluids according to VDMA 24568 (see also RE 90221); HETG (rape seed oil) ¹⁾ ; HEPG (polyglycols) ²⁾ ; HEES (synthetic esters) ²⁾ ; other hydraulic fluids upon request
Hydraulic fluid temperature range		°C	-30 to +80 (NBR seals) -20 to +80 (FKM seals)
Viscosity range		mm ² /s	10 to 800
Maximum permitted degree of contamination of the hydraulic fluid - cleanliness class according to ISO 4406 (c)			Class 20/18/15 ³⁾

¹⁾ Suitable for NBR and FKM seals

²⁾ Only suitable for FKM seals


³⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and at the same time increases the service life of the components.

For selecting the filters, see data sheets RE 50070, RE 50076, RE 50081, RE 50086, RE 50087 and RE 50088.

Characteristic curves (measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

Version "C"


p - q_v characteristic curves

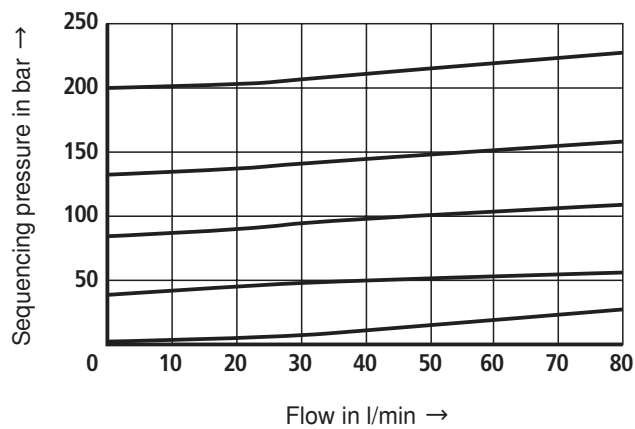

Characteristic curves for version "A" and "P" on request.

The characteristic curves apply to initial pressure = Zero in the entire flow range!

Unit dimensions (dimensions in mm)

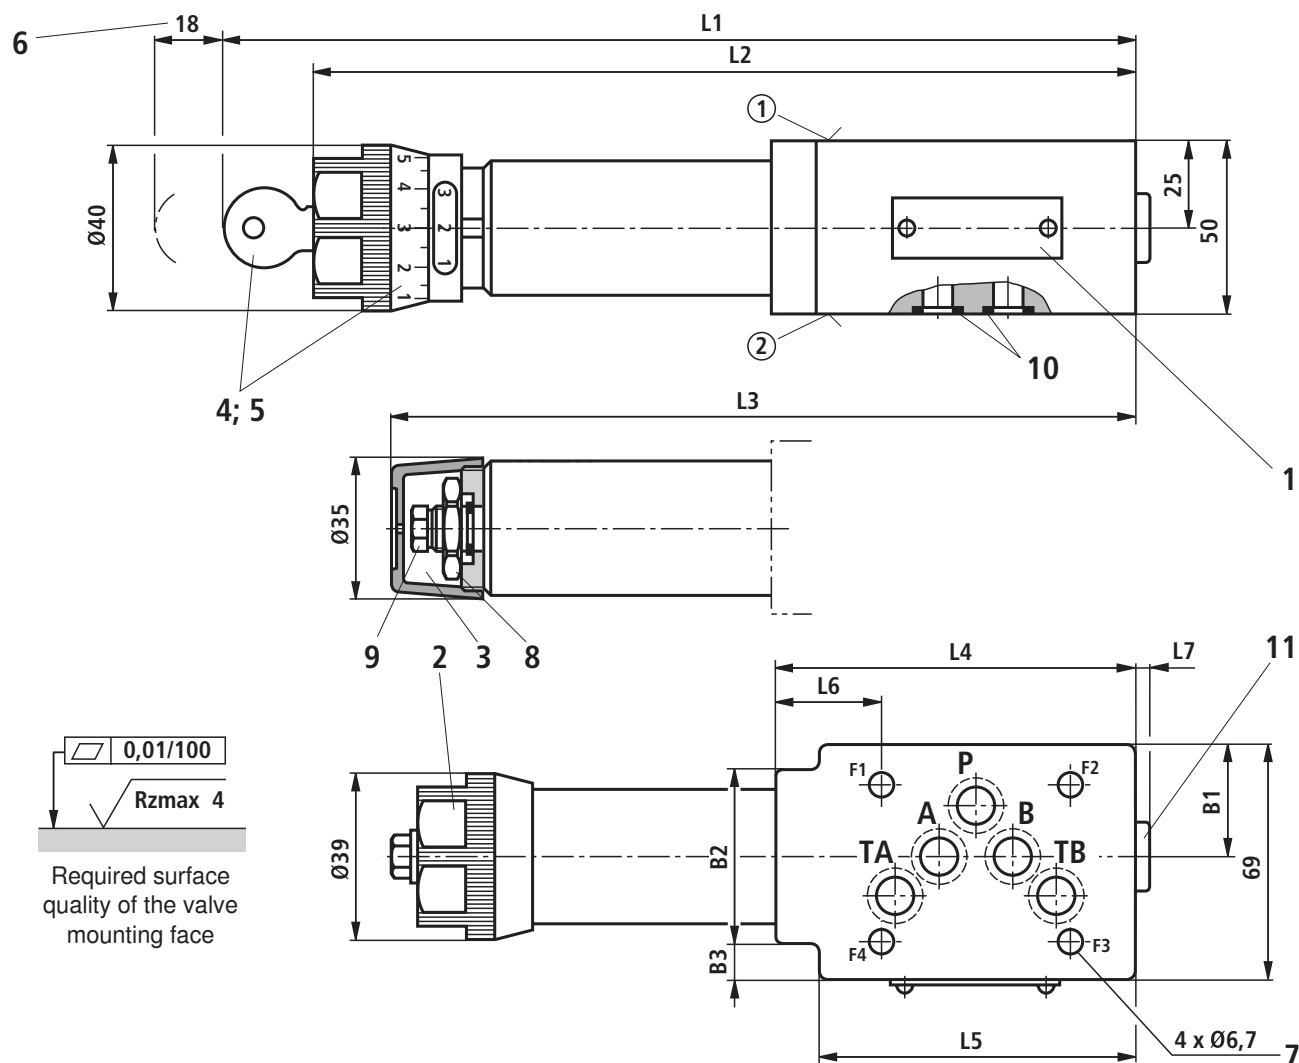

Version	L1	L2	L3	L4	L5	L6	L7	B2	B1	B3
"A"; "C"	255	231	210	104	93	31,5	4	51	32,9	12
"P"	242	218	198	91	–	18,5	16	–	34	–

① Component side – Porting pattern according to ISO 4401-05-04-0-05

② Plate side – Porting pattern according to ISO 4401-05-04-0-05

10 Identical seal rings for ports A②, B②, P②, TA② and TB②; deviating from ISO 4401, port T is in this data sheet called TA, port T1 is called TB.

11 Pressure gauge connection G1/4, 12 deep; internal hexagon SW6

1 Nameplate

2 Adjustment type "1"

3 Adjustment type "2"

4 Adjustment type "3"

5 Adjustment type "7"

6 Dimensions required to remove the key

7 Valve mounting bores

8 Lock nut SW24

9 Hexagon SW10

Valve mounting screws (separate order)

4 hexagon socket head cap screws

ISO 4762 - M6 - 10.9-fIZn-240h-L

Note!

Length and tightening torque of the valve mounting screws must be calculated according to the components mounted under and over the sandwich plate valve.

Notes

Notes
