

Pressure sequence valve, direct operated

Type ZDZ

RE 26088

Edition: 2018-01

Replaces: 05.09



H7648

- ▶ Size 6
- ▶ Component series 4X
- ▶ Maximum operating pressure 210 bar
- ▶ Maximum flow 60 l/min

Features

- ▶ Sandwich plate valve
- ▶ Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole)
- ▶ 4 pressure ratings
- ▶ 4 adjustment types, optionally:
 - Rotary knob
 - Grub screw with hexagon and protective cap
 - Lockable rotary knob with scale
 - Rotary knob with scale
- ▶ Check valve, optional (version "A" only)

Contents

Features	1
Ordering code	2
Symbols	3
Function, section	4
Technical data	5
Characteristic curves	6
Dimensions	7, 8
Further information	9

Ordering code

01	02	03	04	05	06	07	08	09	10	11	12	13
Z	DZ	6	D			-	4X	/		Y		*

01	Sandwich plate valve	Z
02	Pressure sequence valve	DZ
03	Size 6	6
04	Direct operated	D
05	Pressure reduction in channel A②	A
	Pressure reduction in channel P①	P

Adjustment type

06	Rotary knob	1
	Grub screw with hexagon and protective cap	2
	Lockable rotary knob with scale	3 ¹⁾
	Rotary knob with scale	7
07	Component series 40 ... 49 (40 ... 49: unchanged installation and mounting dimensions)	4X

Pressure rating

08	Maximum sequencing pressure 25 bar	25
	Maximum sequencing pressure 75 bar	75
	Maximum sequencing pressure 150 bar	150
	Maximum sequencing pressure 210 bar	210
09	Pilot oil supply internal, pilot oil return external	Y
10	With check valve (only version "A")	no code
	Without check valve	M

Seal material

11	NBR seals	no code
	FKM seals	V
	Observe compatibility of seals with hydraulic fluid used. (other seals on request)	
12	Without locating hole	no code
	With locating hole	/60 ²⁾
13	Further details in the plain text	




¹⁾ H-key with material no. **R900008158** is included in the scope of delivery.

²⁾ Locking pin ISO 8752-3x8-St, material no. **R900005694** (separate order)

**Notice:**

Preferred types and standard units are contained in the EPS (standard price list).

Symbols (① = component side, ② = plate side)

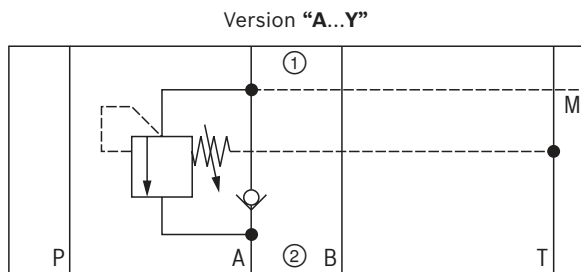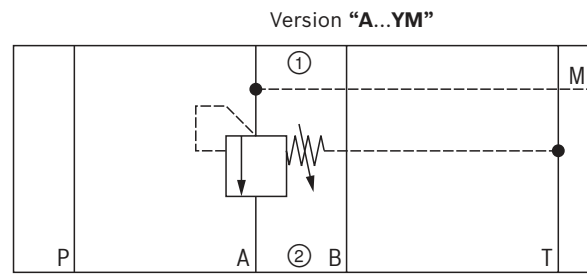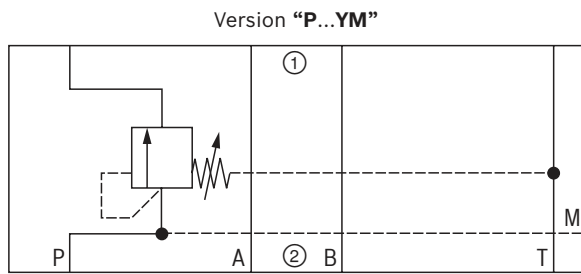

Function, section

Valve type ZDZ is a direct operated pressure sequence valve in sandwich plate design. It is applied for pressure-dependent connection of a second system. The sequencing pressure is set via the adjustment type (4).

Version "P"

The compression spring (3) holds the control spool (2) in initial position, the valve is blocked. The pressure in channel P② is applied via the control line (5) at the spool face of the control spool (2) opposite the compression spring (3).


If channel P② reaches the set value of the compression spring (3), the control spool (2) is moved to the left and the connection from P② to P① is opened. The system connected to channel P① is connected without a pressure drop in channel P②.

The pilot oil return from the spring chamber (7) is always realized externally via the bore (6) to channel T (Y). A pressure gauge connection (8) enables control of the sequencing pressure at the valve.


Version "A"

Here, pressure sequencing is realized in channel A. Control signal and pilot oil are supplied internally from channel A①.

A check valve can be optionally installed for free hydraulic fluid flow back from A② to A①.

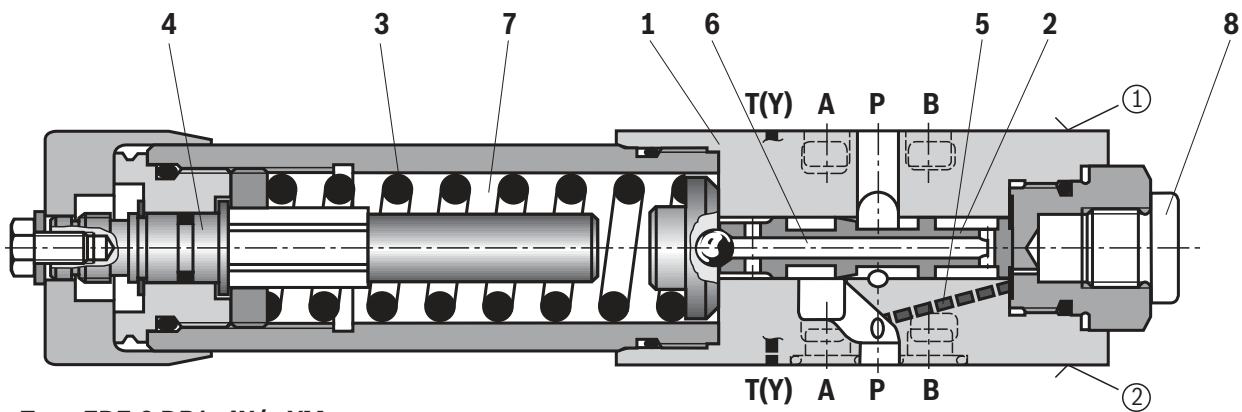

Type ZDZ 6 DP1-4X/...YM...

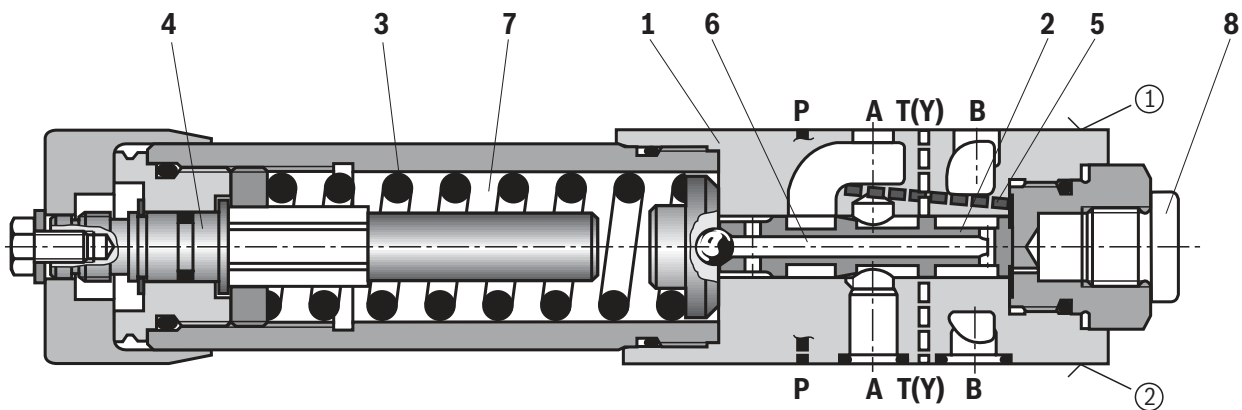

Type ZDZ 6 DA1-4X/...YM

① = component side
② = plate side

Technical data

(For applications outside these parameters, please consult us!)

general		
Weight	kg	ca. 1.2
Installation position		any
Ambient temperature range	°C	–30 ... +80 (NBR seals) –20 ... +80 (FKM seals)

hydraulic		
Maximum operating pressure	► Port P, A, B	bar 210
	► Port T(Y)	bar 160
Maximum sequencing pressure	bar	25; 75; 150; 210
Maximum flow	l/min	60
Hydraulic fluid		see table below
Hydraulic fluid temperature range	°C	–30 ... +80 (NBR seals)
		–20 ... +80 (FKM seals)
Viscosity range	mm ² /s	10 ... 800
Maximum admissible degree of contamination of the hydraulic fluid, cleanliness class according to ISO 4406 (c)		Class 20/18/15 ¹⁾

Hydraulic fluid	Classification	Suitable sealing materials	Standards	Data sheet
Mineral oils	HL, HLP, HLPD	NBR, FKM	DIN 51524	90220
Bio-degradable	► Insoluble in water	HETG	ISO 15380	90221
		HEES		
	► Soluble in water	HEPG	ISO 15380	
Flame-resistant	► Water-free	HFDU (glycol base)	ISO 12922	90222
		HFDU (ester base)		
		HFDR		
	► Containing water	HFC (Fuchs Hydrotherm 46M, Petrofer Ultra Safe 620)	ISO 12922	90223

**Important information on hydraulic fluids:**

- For further information and data on the use of other hydraulic fluids, please refer to the data sheets above or contact us.
- There may be limitations regarding the technical valve data (temperature, pressure range, life cycle, maintenance intervals, etc.).
- The ignition temperature of the hydraulic fluid used must be 50 K higher than the maximum surface temperature.

► Flame-resistant – containing water:

- Maximum pressure differential 210 bar, otherwise, increased cavitation erosion
- Life cycle as compared to operation with mineral oil HL, HLP 30 ... 100%
- Maximum hydraulic fluid temperature 60 °C

- **Bio-degradable and flame-resistant:** If this hydraulic fluid is used, small amounts of dissolved zinc may get into the hydraulic system.



¹⁾ The cleanliness classes specified for the components must be adhered to in hydraulic systems. Effective filtration prevents faults and simultaneously increases the life cycle of the components.

For the selection of filters, see www.boschrexroth.com/filter.



Characteristic curves

(measured with HLP46, $\vartheta_{oil} = 40 \pm 5 \text{ }^{\circ}\text{C}$)

p - q_v characteristic curves

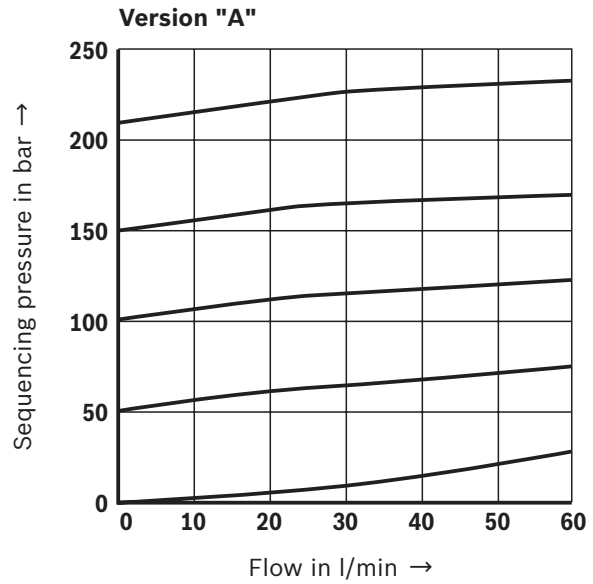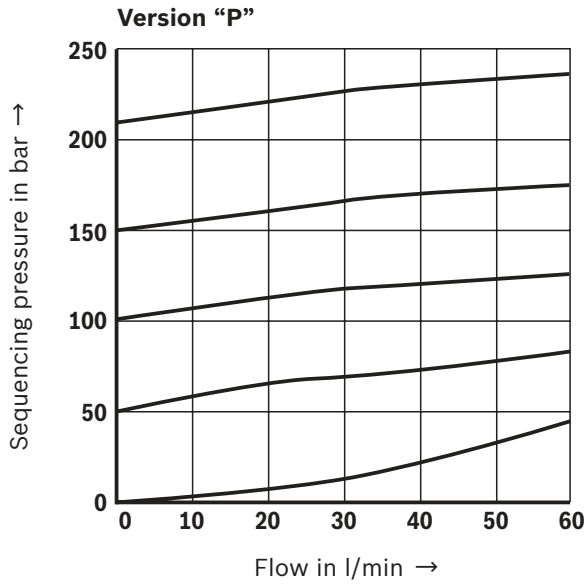

Δp - q_v characteristic curves

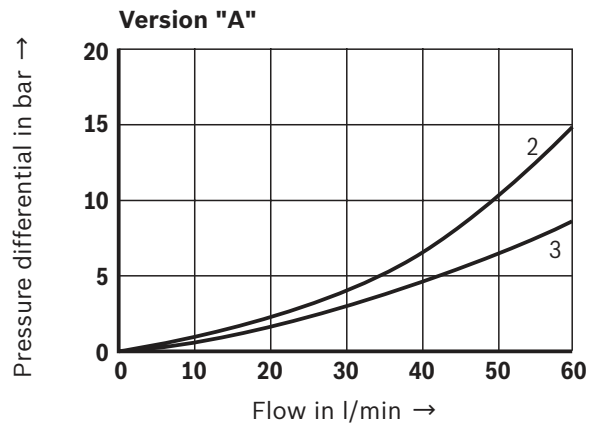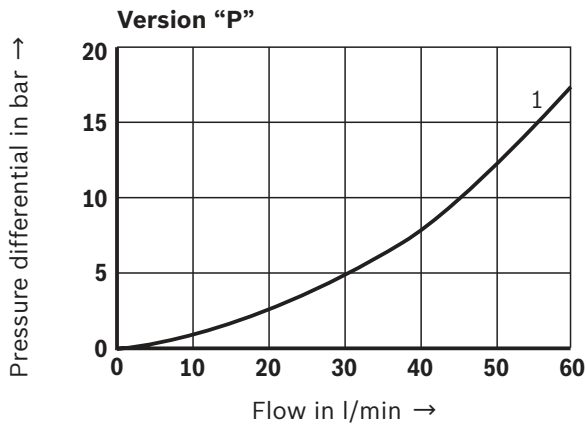


Notes:

The characteristic curves apply to the pressure at the valve output $p_T = 0 \text{ bar}$ across the entire flow range.

- 1 P① to P②
- 2 A① to A②
- 3 A② to A①; flow only via check valve

Dimensions: Version "P"
(dimensions in mm)

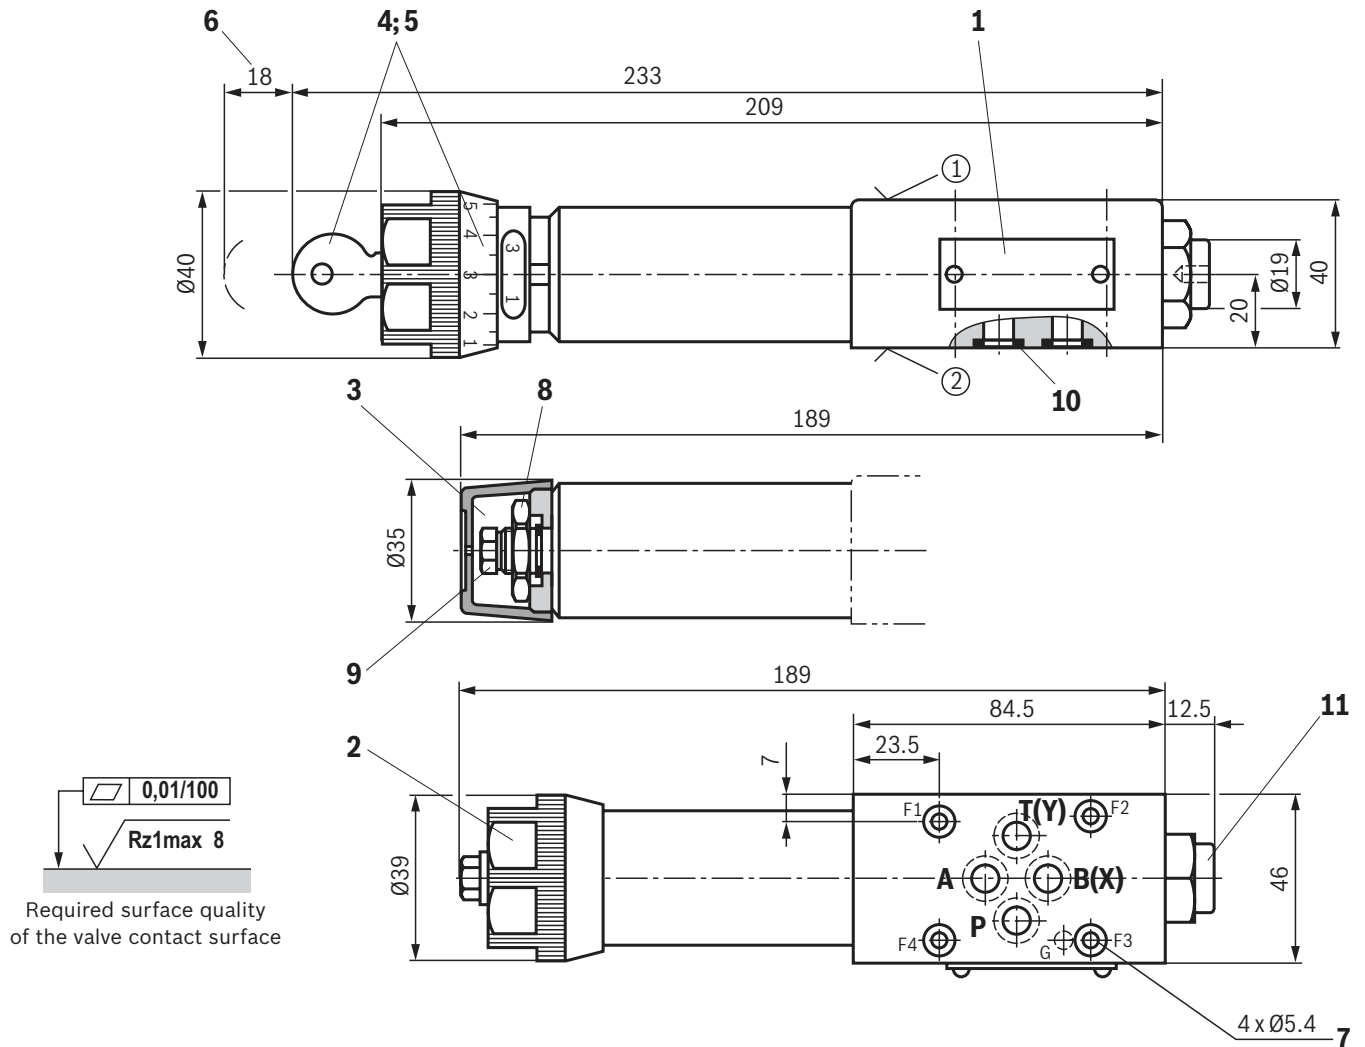

- ① component side – Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole); **(with locating hole Ø4 x 4 mm deep)**
- ② plate side – Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole); **(with locating hole for locking pin ISO 8752-3x8-St; separate order, material no. R900005694)**

- 1 Name plate
- 2 Adjustment type "1"
- 3 Adjustment type "2"
- 4 Adjustment type "3"
- 5 Adjustment type "7"
- 6 Space required to remove the key
- 7 Valve mounting bores
- 8 Lock nut SW24
- 9 Hexagon, wrench size 10
- 10 Identical seal rings for ports A, B, P, T(Y)
- 11 Pressure gauge connection G1/4; 12 deep; internal hexagon SW6


Subplates (separate order) with porting pattern according to ISO 4401-03-02-0-05 see data sheet 45100.

Valve mounting screws (separate order)
4 hexagon socket head cap screws ISO 4762 - M5 - 10.9

Notes:

- Length and tightening torque of the valve mounting screws must be calculated according to the components mounted under and over the sandwich plate valve.
- The dimensions are nominal dimensions which are subject to tolerances.

Dimensions: Version "A"
(dimensions in mm)

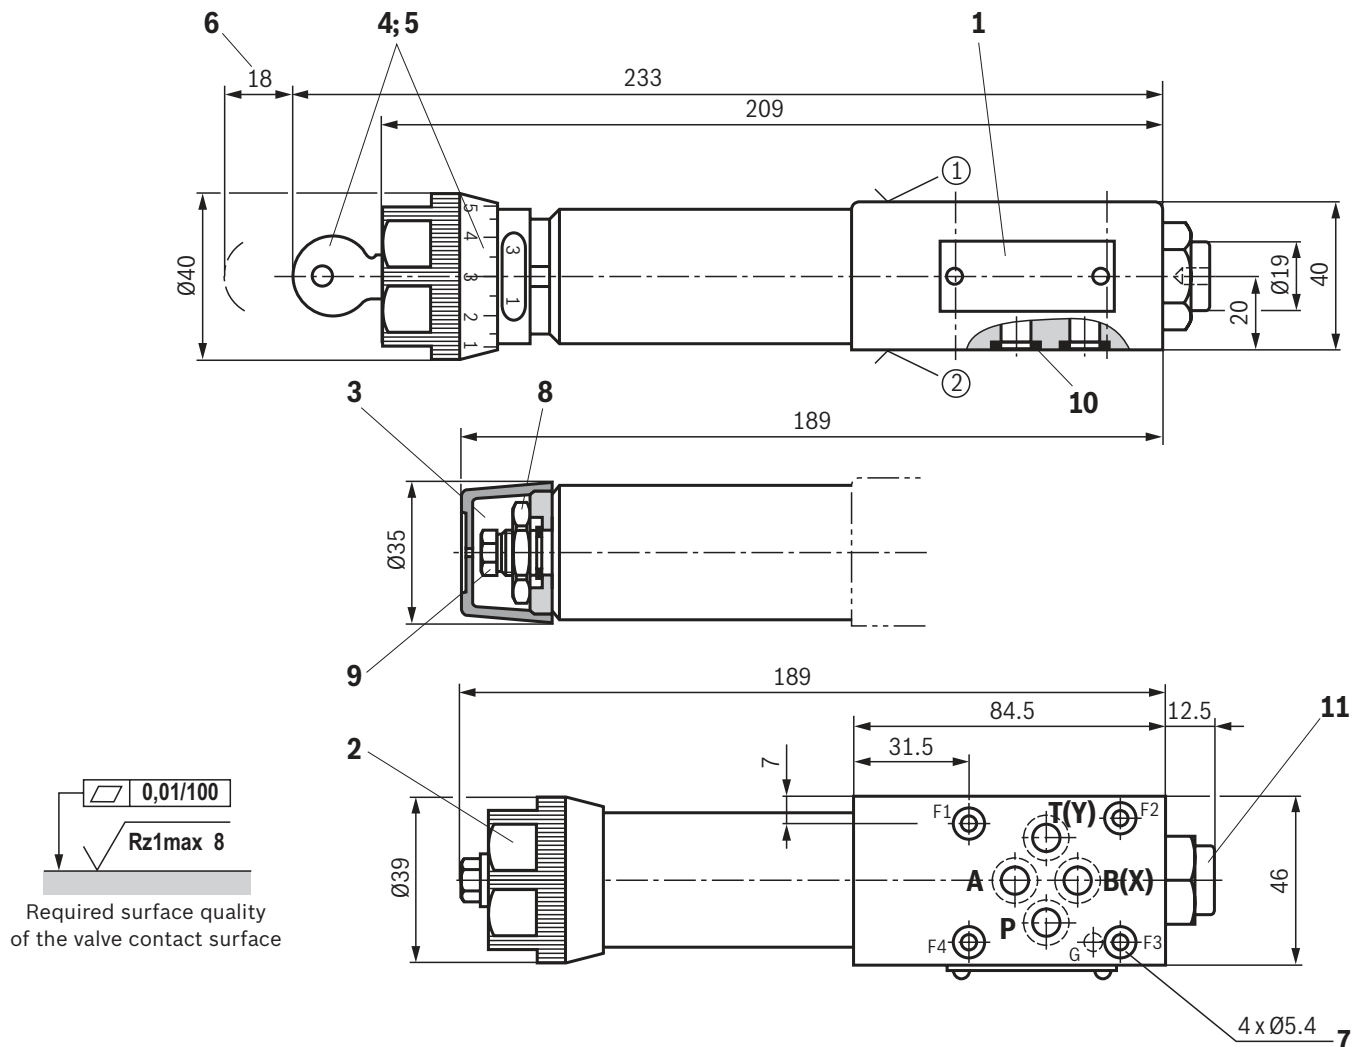

- ① component side – Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole); **(with locating hole Ø4 x 4 mm deep)**
- ② plate side – Porting pattern according to ISO 4401-03-02-0-05 (with or without locating hole); **(with locating hole for locking pin ISO 8752-3x8-St; separate order, material no. R900005694)**

- 1** Name plate
- 2** Adjustment type "1"
- 3** Adjustment type "2"
- 4** Adjustment type "3"
- 5** Adjustment type "7"
- 6** Space required to remove the key
- 7** Valve mounting bores
- 8** Lock nut SW24
- 9** Hexagon, wrench size 10
- 10** Identical seal rings for ports A, B, P, T(Y)
- 11** Pressure gauge connection G1/4; 12 deep; internal hexagon SW6

Subplates (separate order) with porting pattern according to ISO 4401-03-02-0-05 see data sheet 45100.

Valve mounting screws (separate order)
4 hexagon socket head cap screws ISO 4762 - M5 - 10.9

 Notes:

- ▶ Length and tightening torque of the valve mounting screws must be calculated according to the components mounted under and over the sandwich plate valve.
- ▶ The dimensions are nominal dimensions which are subject to tolerances.

Further information

- ▶ Hydraulic valves for industrial applications
- ▶ Subplates
- ▶ Hydraulic fluids on mineral oil basis
- ▶ Environmentally compatible hydraulic fluids
- ▶ Flame-resistant, water-free hydraulic fluids
- ▶ Flame-resistant hydraulic fluids - containing water (HFAE, HFAS, HFB, HFC)
- ▶ Selection of filters
- ▶ Information on available spare parts

Operating instructions 07600-B

Data sheet 45100

Data sheet 90220

Data sheet 90221

Data sheet 90222

Data sheet 90223

www.boschrexroth.com/filter

www.boschrexroth.com/spc

Notes

Bosch Rexroth AG
Industrial Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/ 40 30 20
my.support@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Industrial Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52 / 40 30 20
my.support@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.

Notes

Bosch Rexroth AG
Industrial Hydraulics
Zum Eisengießer 1
97816 Lohr am Main, Germany
Phone +49 (0) 93 52/ 40 30 20
my.support@boschrexroth.de
www.boschrexroth.de

© This document, as well as the data, specifications and other information set forth in it, are the exclusive property of Bosch Rexroth AG. It may not be reproduced or given to third parties without its consent.
The data specified above only serve to describe the product. No statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification. It must be remembered that our products are subject to a natural process of wear and aging.