


## Retaining system to DIN 2353

Mild Steel

1/1

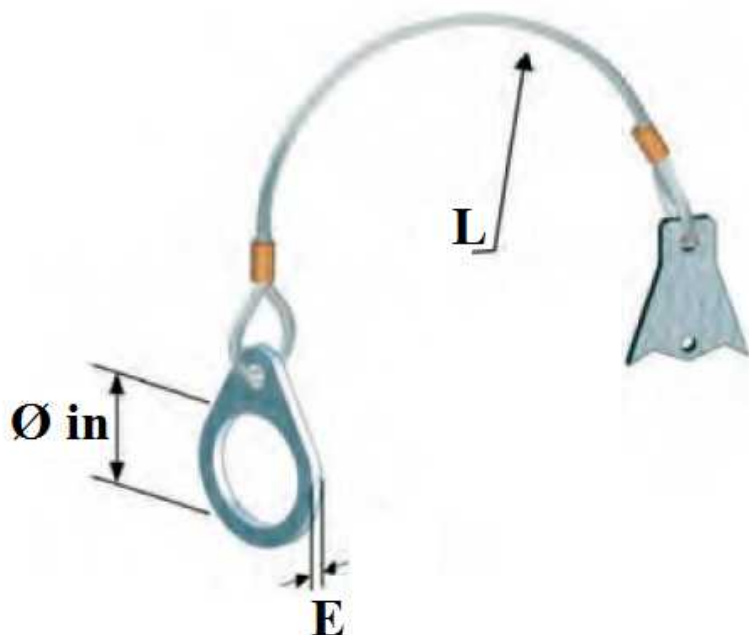

**Standards:** Tested to ensure the retention of the hose up to the maximum pressure in compliance with the following standards: EN 853, EN 854, EN 855, EN 856, EN857, SAE J517

| Part n°            | Ø in | Details          | Max. Press. (bar) | Max. Pressure (psi) | E      | L   |
|--------------------|------|------------------|-------------------|---------------------|--------|-----|
| STOPFUDIN 145 CONF | 14.5 | 8L - 1/4"        | 450               | 6.525               | 2 mm   | 300 |
| STOPFUDIN 17 CONF  | 17   | 8S - 10L - 3/8"  | 445               | 6.453               | 2 mm   | 300 |
| STOPFUDIN 185 CONF | 18.5 | 10S - 12L        | 420               | 6.090               | 2 mm   | 300 |
| STOPFUDIN 205 CONF | 20.5 | 12S              | 420               | 6.090               | 2 mm   | 300 |
| STOPFUDIN 225 CONF | 22.5 | 14S - 15L - 1/2" | 420               | 6.090               | 2 mm   | 300 |
| STOPFUDIN 245 CONF | 24.5 | 16S - 5/8"       | 420               | 6.090               | 2 mm   | 300 |
| STOPFUDIN 265 CONF | 26.5 | 18L - 3/4"       | 420               | 6.090               | 2 mm   | 300 |
| STOPFUDIN 305 CONF | 30.5 | 20S - 22L        | 420               | 6.090               | 2,5 mm | 300 |
| STOPFUDIN 34 CONF  | 34   | 1"               | 420               | 6.090               | 2,5 mm | 450 |
| STOPFUDIN 365 CONF | 36.5 | 25S - 28L        | 420               | 6.090               | 2,5 mm | 450 |
| STOPFUDIN 425 CONF | 42.5 | 30S - 1" 1/4     | 420               | 6.090               | 2,5 mm | 450 |
| STOPFUDIN 455 CONF | 45.5 | 35L              | 420               | 6.090               | 2,5 mm | 450 |
| STOPFUDIN 49 CONF  | 49   | 1" 1/2           | 420               | 6.090               | 2,5 mm | 450 |
| STOPFUDIN 525 CONF | 52.5 | 38S - 42L        | 385               | 5.583               | 2,5 mm | 450 |
| STOPFUDIN 60 CONF  | 60   | 2"               | 350               | 5.075               | 2,5 mm | 450 |

Details = Recommended for that coupling size