


Retaining system for flanges

Mild Steel

1/1

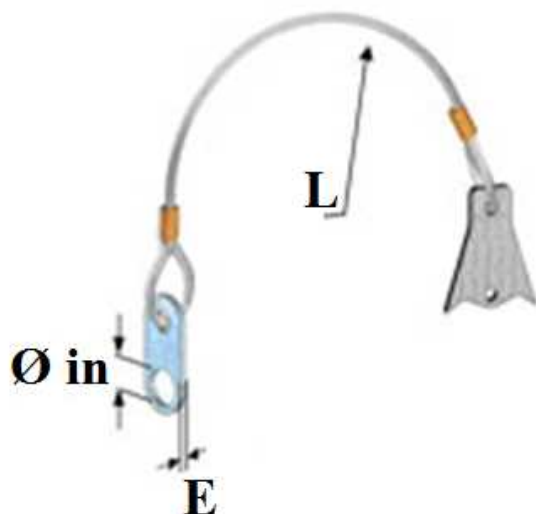

Standards: Tested to ensure the retention of the hose up to the maximum pressure in compliance with the following standards: EN 853, EN 854, EN 855, EN 856, EN857, SAE J517

Part n°	Ø in	Details	Max. Press. (bar)	Max. Pressure (psi)	E	L
STOPFUSAE 085 CONF	8.5	1/2" 3000-6000	415	6.018	4 mm	300
STOPFUSAE 2105 CONF	10.5	3/4"-1"-1" 1/4 3000-3/4" 6000	420	6.090	4 mm	300
STOPFUSAE 105 CONF	10.5	3/4"-1" -1" 1/4 3000-3/4" 6000	420	6.090	4 mm	450
STOPFUSAE 125 CONF	12.5	1" 1/2 -2" 3000-1" 6000	420	6.090	4 mm	450
STOPFUSAE 145 CONF	14.5	1" 1/4" 6000"	420	6.090	4 mm	450
STOPFUSAE 165 CONF	16.5	1" 1/2 6000	420	6.090	4 mm	450
STOPFUSAE 205 CONF	20.5	2" 6000	350	5.075	4 mm	450
STOPFUSAE 25 CONF	25	2" 1/2 6000	350	5.075	8 mm	550
STOPFUSAE 32 CONF	32	3" 6000	210	3.045	8 mm	550

Details = Recommended for that flange size