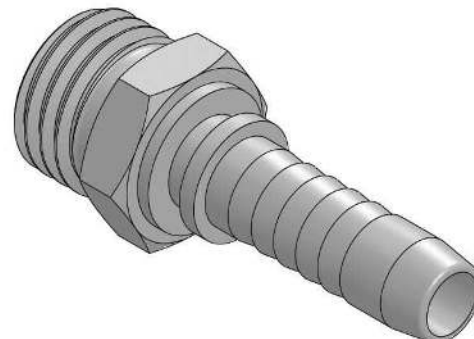
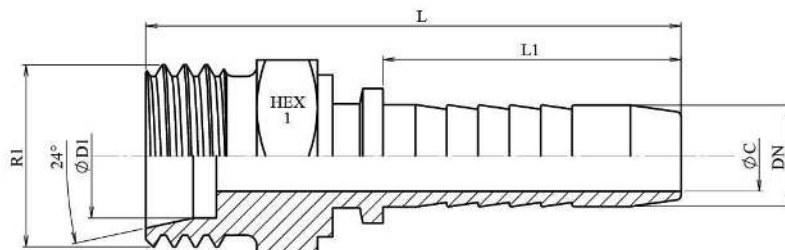


Male stud Metric thread 24° cone

Mild Steel 1.0737 (or equivalent)

1/2

Part nº	DN	ØD1	Serie	R1	L	L1	HEX 1	ØC
24203120603	3/16"	6	L	12x1,5	43	24	12	3
24203120604	1/4"	6	L	12x1,5	47,5	28	12	4
24203140804	1/4"	8	L	14x1,5	49	28	17	4
24203161004	1/4"	10	L	16x1,5	52	28	17	4
24203161005	5/16"	10	L	16x1,5	52,3	28	17	5,5
24203161006	3/8"	10	L	16x1,5	54	29,5	17	7
24203181204	1/4"	12	L	18x1,5	53	28	19	4
24203181205	5/16"	12	L	18x1,5	53,3	28	19	5,5
24203181206	3/8"	12	L	18x1,5	53	29,5	19	7
24203221506	3/8"	15	L	22x1,5	54	29,5	24	7
24203221508	1/2"	15	L	22x1,5	55,5	30,5	24	9,5
24203261808	1/2"	18	L	26x1,5	57,5	30,5	27	9,5
24203261810	5/8"	18	L	26x1,5	61,3	34	27	12
24203302212	3/4"	22	L	30x2	69	39	32	15
24203362816	1"	28	L	36x2	78	47	41	19
24203453520	1"1/4	35	L	45x2	91	54,5	46	26
24203524224	1"1/2	42	L	52x2	95,5	58	55	32
24203160804	1/4"	8	S	16x1,5	52	28	17	4
24203181004	1/4"	10	S	18x1,5	54	28	19	4
24203181005	5/16"	10	S	18x1,5	54,3	28	19	5,5
24203181006	3/8"	10	S	18x1,5	56	29,5	19	7
24203201205	5/16"	12	S	20x1,5	58,3	28	22	7
24203201206	3/8"	12	S	20x1,5	60	29,5	22	7
24203221406	3/8"	14	S	22x1,5	59,5	29,5	24	7
24203241608	1/2"	16	S	24x1,5	61,5	30,5	27	9,5
24203302010	5/8"	20	S	30x2	69,3	34	32	12
24203302012	3/4"	20	S	30x2	75,5	39	32	15

Male stud Metric thread 24° cone

Mild Steel 1.0737 (or equivalent)

2/2

Part nº	DN	ØD1	Serie	R1	L	L1	HEX 1	ØC
24203362512	3/4"	25	S	36x2	79	39	41	15
24203362516	1"	25	S	36x2	87	47	41	19
24203423016	1"	30	S	42x2	90	47	46	19
24203523820	1"1/4	38	S	52x2	101	54,5	55	26