


ORFS Male flat seat + o´ring

Mild Steel 1.0737 (or equivalent)

1/1

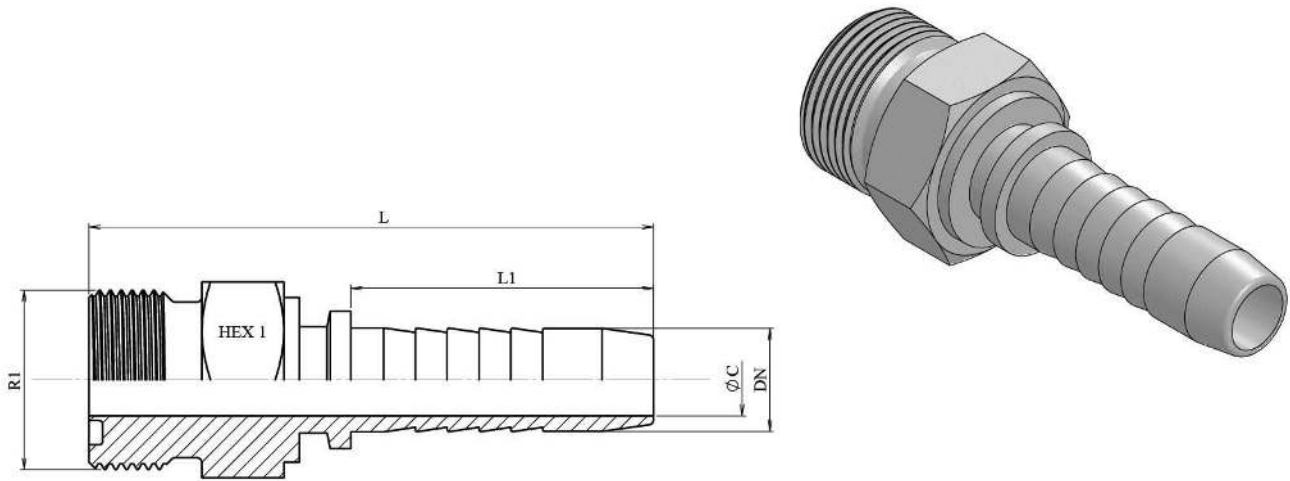

| Part nº   | DN    | R1              | L    | L1   | HEX 1 | ØC  |
|-----------|-------|-----------------|------|------|-------|-----|
| 449120404 | 1/4"  | 9/16" 18h UNF   | 50,5 | 28   | 17    | 4   |
| 449120604 | 1/4"  | 11/16" 16h UNF  | 53   | 28   | 19    | 4   |
| 449120605 | 5/16" | 11/16" 16h UNF  | 53,5 | 28   | 19    | 5,5 |
| 449120606 | 3/8"  | 11/16" 16h UNF  | 55   | 29,5 | 19    | 7   |
| 449120806 | 3/8"  | 13/16" 16h UNF  | 58   | 29,5 | 22    | 7   |
| 449120808 | 1/2"  | 13/16" 16h UNF  | 59,5 | 30,5 | 22    | 9,5 |
| 449121008 | 1/2"  | 1" 14h UNF      | 62,5 | 30,5 | 27    | 9,5 |
| 449121010 | 5/8"  | 1" 14h UNF      | 67,3 | 34   | 27    | 12  |
| 449121208 | 1/2"  | 1"3/16 12h UNF  | 65   | 30,5 | 32    | 9,5 |
| 449121212 | 3/4"  | 1"3/16 12h UNF  | 75   | 39   | 32    | 15  |
| 449121612 | 3/4"  | 1"7/16 12h UNF  | 77,5 | 39   | 41    | 15  |
| 449121616 | 1"    | 1"7/16 12h UNF  | 86   | 47   | 41    | 19  |
| 449122020 | 1"1/4 | 1"11/16-12h UNF | 95   | 54,5 | 46    | 26  |